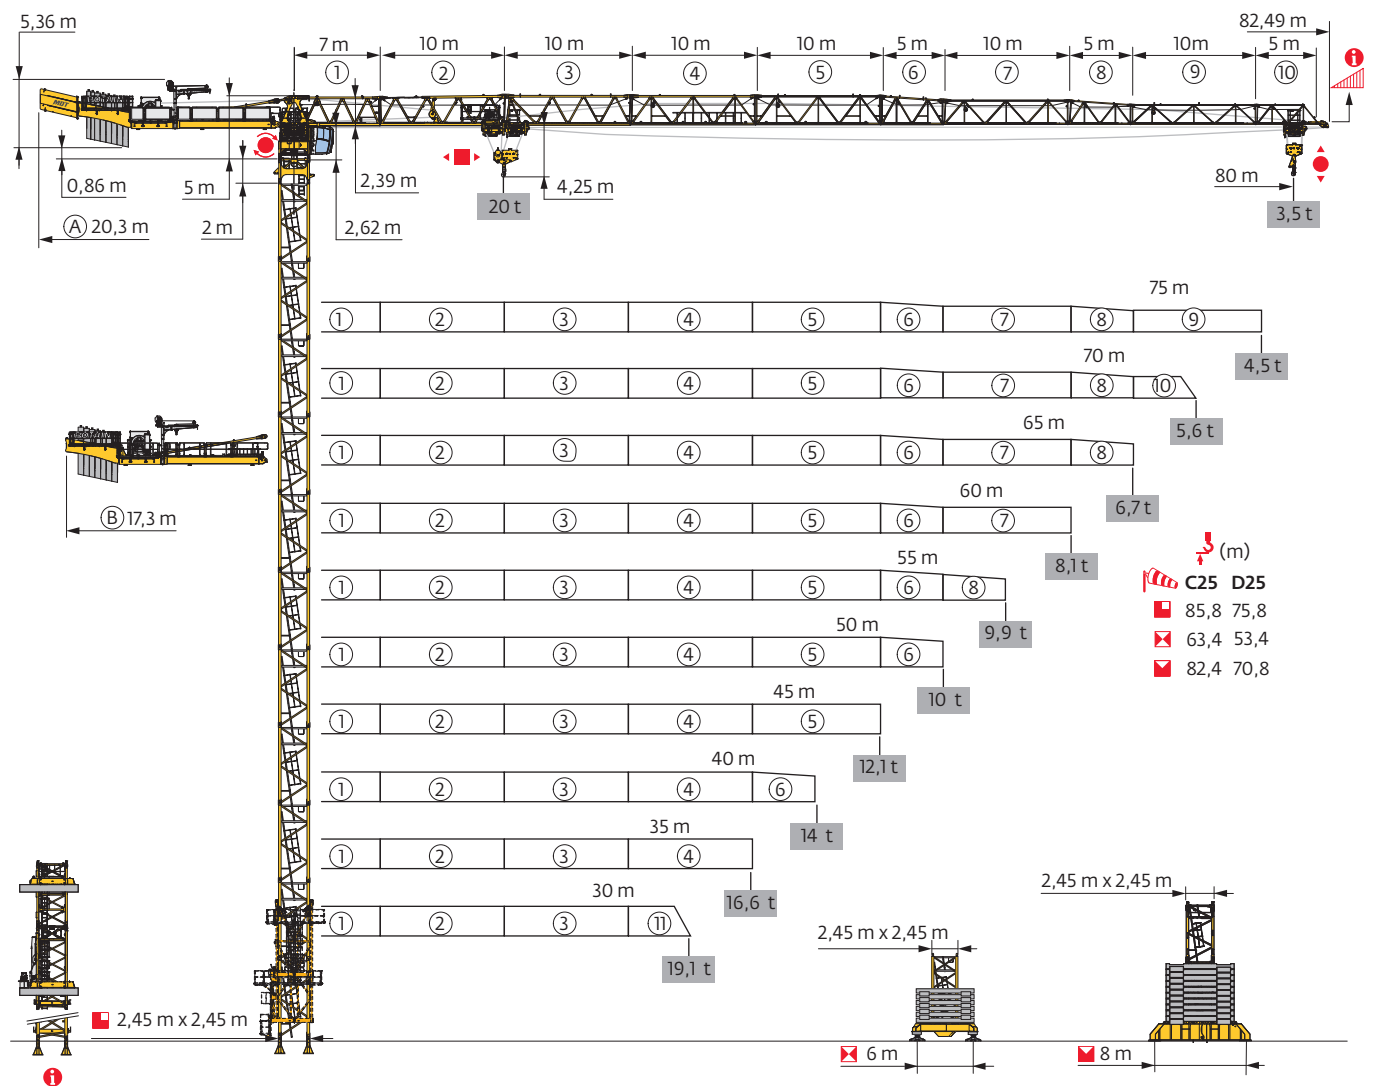



MDT 489 M20



Potain Plus




Power Control



Top Site




Top Tracing 3



Mât - Réactions / Mast - Reaktionskräfte / Mast - Reactions / Mástil - Reacciones / Torre - Reazioni
Tramo - Reacções / Реакция опор мачты

2,45 m - P 800B - C25											
ΔΔΔ (m)	30	35	40	45	50	55	60	65	70	75	80
↓ (m)	72,5	72,5	72,5	72,5	70,8	70,8	70,8	69,1	67,5	65,8	62,5
↓/P↓ (m)	72,5	72,5	72,5	72,5	70,8	70,8	70,8	69,1	67,5	65,8	62,5
	2 m	1	1	1	1	1	1	1	1	1	1
	3,33 m	2	2	2	0	0	0	1	2	0	2
	5 m	13	13	13	13	14	14	14	13	12	11
F2 (t)	● 240	239	242	241	227	241	238	232	232	225	213
	■ 380	377	383	387	362	366	369	360	354	345	320
F3 (t)	● 162	159	158	155	150	152	148	142	141	136	123
	■ 310	304	308	310	285	287	288	278	273	265	241
↓ (m) D25	62,5	62,5	62,5	62,5	62,5	62,5	60,8	60,8	60,8	59,1	59,1
↓/P↓ (m) D25	62,5	62,5	62,5	62,5	62,5	62,5	60,8	60,8	60,8	59,1	59,1

2,45 m - P 854A - C25											
ΔΔΔ (m)	30	35	40	45	50	55	60	65	70	75	80
↓ (m)	85,8	85,8	85,8	85,8	85,8	84,1	84,1	84,1	82,5	80,8	80,8
↓/P↓ (m)	85,8	85,8	85,8	85,8	85,8	84,1	84,1	84,1	82,5	80,8	80,8
	2 m	1	1	1	1	1	1	1	1	1	1
	3,33 m	0	0	0	0	1	1	1	2	0	0
	5 m	17	17	17	17	16	16	16	15	16	16
F2 (t)	● 279	277	282	280	270	282	281	281	285	277	278
	■ 548	545	553	556	558	545	551	554	548	527	532
F3 (t)	● 191	187	187	184	173	182	179	179	182	179	178
	■ 468	462	468	469	470	455	458	461	454	438	442
↓ (m) D25	74,1	75,8	74,1	74,1	74,1	74,1	74,1	72,5	72,5	70,8	70,8
↓/P↓ (m) D25	74,1	75,8	74,1	74,1	74,1	74,1	74,1	72,5	72,5	70,8	70,8

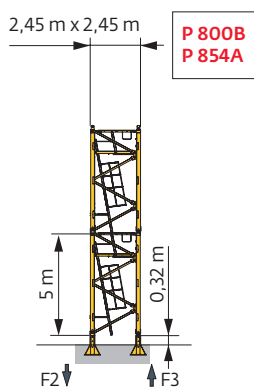


i Accès motorisés : compositions de mât, de lest de base et réactions adaptées, / Motorisierter Zugang vom : Mastzusammensetzung, Grundballast und Reaktionskräfte sind angepasst, / Motorized accesses: adapted mast composition, base ballast and reactions, / Acceso a cabina con elevador: Adaptación de composición de mástil, lastre de base y reacciones, / Accessi motorizzati: composizioni elementi torre, zavorre di base e reazioni aggiornate, / Acessos motorizados: composições de coluna, lastro da base e reacções adaptadas, / Лифты : адаптированная композиция мачты, базовый балласт и нагрузки,


2,45 m - ZX 6830 - C25												
ΔΔΔΔ (m)	30	35	40	45	50	55	60	65	70	75	80	
Δ (m)	58,4	60,1	58,4	58,4	63,4	61,7	61,7	61,7	61,7	60,1	58,4	
Δ/PΔ (m)	56,7	58,4	56,7	56,7	63,4	56,7	56,7	61,7	58,4	60,1	58,4	
2 m	1	1	1	1	1	1	1	1	1	1	1	
3,33 m	2	1	2	2	2	0	0	0	0	1	2	
5 m	10	11	10	10	11	12	12	12	12	11	10	
FI (t)	● 140	142	142	141	140	143	139	142	143	143	140	
	■ 141	146	142	142	174	161	162	166	172	174	167	
Δ (m) D25	53,4	53,4	53,4	53,4	53,4	53,4	53,4	51,7	51,7	50,1	50,1	
Δ/PΔ (m) D25	53,4	53,4	53,4	53,4	53,4	53,4	53,4	51,7	51,7	50,1	50,1	

2,45 m - ZY 800 - C25												
ΔΔΔΔ (m)	30	35	40	45	50	55	60	65	70	75	80	
Δ (m)	72,2	72,2	72,2	72,2	68,8	68,8	68,8	68,8	67,2	65,5	62,2	
Δ/PΔ (m)	72,2	72,2	72,2	67,2	68,8	68,8	68,8	68,8	67,2	65,5	62,2	
2 m	1	1	1	1	1	1	1	1	1	1	1	
3,33 m	0	0	0	0	2	2	2	2	0	1	0	
5 m	14	14	14	14	12	12	12	12	13	12	12	
FI (t)	● 145	143	145	146	133	141	141	141	135	133	125	
	■ 186	183	187	190	173	174	176	180	171	174	156	
Δ (m) D25	62,2	62,2	62,2	62,2	62,2	60,5	60,5	60,5	58,8	57,2	57,2	
Δ/PΔ (m) D25	62,2	62,2	62,2	62,2	62,2	60,5	60,5	60,5	58,8	57,2	57,2	

2,45 m - ZY 854 - C25												
ΔΔΔΔ (m)	30	35	40	45	50	55	60	65	70	75	80	
Δ (m)	82,4	82,4	82,4	82,4	82,4	82,4	82,4	82,4	80,8	79,1	79,1	
Δ/PΔ (m)	82,4	82,4	82,4	82,4	82,4	82,4	82,4	82,4	80,8	79,1	79,1	
2 m	1	1	1	1	1	1	1	1	1	1	1	
3,33 m	0	0	0	0	0	0	0	0	1	2	2	
5 m	16	16	16	16	16	16	16	16	15	14	14	
FI (t)	● 178	179	182	183	179	188	187	187	187	185	187	
	■ 260	259	263	267	268	271	273	278	273	273	277	
Δ (m) D25	69,1	70,8	70,8	70,8	70,8	70,8	70,8	70,8	70,8	69,1	69,1	
Δ/PΔ (m) D25	69,1	70,8	70,8	70,8	70,8	70,8	70,8	70,8	70,8	69,1	69,1	

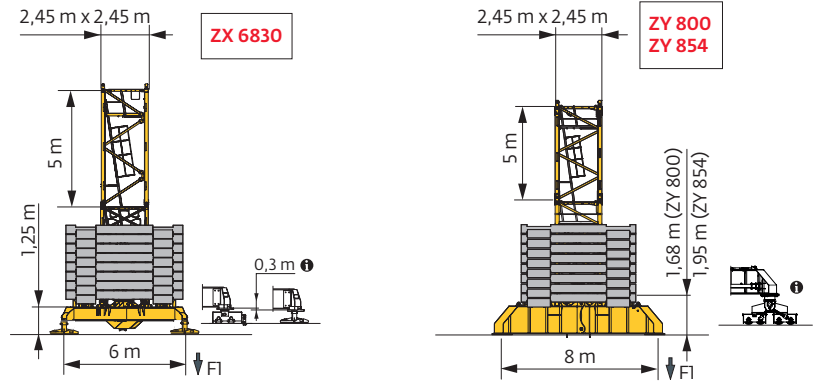

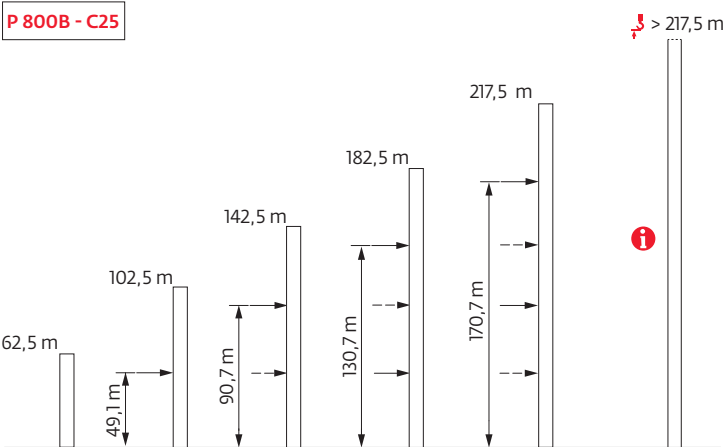Ancrages / Verankerungen / Anchorages / Anclajes / Ancoraggi
Ancoragem / крепеж



Lest de base / Grundballast / Base ballast / Lastre de base / Zavorra di base
 Lastro da base / Базовый Балласт

 (t) /  2,45 m - ZX 6830 -  - C25											
▲▼▲ (m)	30	35	40	45	50	55	60	65	70	75	80
63,4	131										
61,7					121	131	121	121	131		
60,1		141			121	121	111	121	131	131	
58,4	141	141	141	131	111	121	111	121	131	131	131
53,4	141	141	131	131	101	121	111	111	121	121	121
48,4	131	131	131	121	91	111	101	111	121	121	121
43,4	121	121	111	111	91	101	91	111	121	111	121
38,4	111	111	111	101	81	101	81	101	111	111	111
33,4	111	111	101	101	81	101	81	101	111	111	111
28,4	111	111	101	101	81	101	81	101	111	101	111
23,4	111	111	101	101	81	91	81	101	111	101	111

 (t) /  2,45 m - ZY 800 -  - C25											
▲▼▲ (m)	30	35	40	45	50	55	60	65	70	75	80
72,2	132	120	120	120							
68,8	108	96	96	96	96	96	96	96			
67,2	96	84	84	84	72	72	72	72	84		
65,5	84	72	72	72	72	72	60	60	72	84	
62,2	72	72	72	60	48	48	48	48	60	60	72
57,2	72	60	60	60	36	48	36	48	60	60	60
52,2	60	60	60	48	36	48	36	48	60	60	60
47,2	60	48	48	48	36	48	36	48	60	60	60
42,2	48	48	48	36	36	48	36	48	48	60	60
37,2	48	36	36	36	36	48	36	48	48	48	60
32,2 ↓	48	36	36	36	36	48	36	48	48	48	48
22,2	48	36	36	36	36	48	36	48	48	48	48

 (t) /  2,45 m - ZY 854 -  - C25											
▲▼▲ (m)	30	35	40	45	50	55	60	65	70	75	80
82,4	204	204	204	204	204	204	204	204			
80,8	192	192	192	192	192	192	192	192	204		
79,1	180	168	180	180	168	168	168	180	180	204	204
74,1	144	132	132	132	132	132	120	132	132	156	156
69,1	108	96	96	96	84	84	84	84	96	108	108
64,1	72	60	60	60	48	48	48	48	60	72	72
59,1	60	60	48	48	36	36	36	36	48	60	60
54,1	60	48	48	48	24	36	24	36	48	48	48
49,1	48	48	36	36	24	36	24	36	48	48	48
44,1	36	36	36	36	24	36	24	36	48	48	48
39,1	36	36	36	24	24	36	24	36	48	48	48
34,1	36	36	36	24	24	36	24	36	48	36	48
29,1	36	36	36	24	24	36	24	36	48	36	36
24,1	36	36	36	24	24	36	24	36	48	36	36
19,1	36	36	36	24	24	36	24	36	48	36	36

Courbes de charges / Lastkurven / Load curves / Curvas de cargas / Curve di carico / Curvas de carga / Кривые нагрузок



				17	20	25	30	35	40	42	45	47	50	52	55	57	60	62	65	67	70	72	75	77	80	m
	20 t	10 t																								
80	4,5 → 17,2	30,1 - 33,5	20	16,7	12,7	10,1	9,5	8,1	7,6	7	6,6	6,1	5,8	5,4	5,2	4,8	4,6	4,3	4,1	3,9	3,7	3,5	3,4	3,2	t	
	4,5 → 18,7	32,4 - 36	20	18,4	14	11,1	10	8,9	8,4	7,7	7,3	6,7	6,4	6	5,7	5,3	5,1	4,8	4,6	4,3	4,1	3,9	3,7	3,5	t	P+
75	4,5 → 20,2	34,6 - 38,1	20	20	15,3	12,1	10	9,4	8,9	8,1	7,7	7,1	6,8	6,3	6	5,6	5,4	5	4,8	4,5	4,3	4,1	t			
	4,5 → 21,8	37,1 - 41	20	20	16,8	13,3	10,8	10	9,8	9	8,5	7,8	7,4	6,9	6,6	6,2	5,9	5,5	5,3	5	4,8	4,5	t	P+		
70	4,5 → 23,8	39,7 - 43,3	20	20	18,8	14,7	11,9	10	10	9,5	9	8,3	7,9	7,3	6,9	6,5	6,2	5,8	5,5	5,2	t					
	4,5 → 25	41,9 - 45,8	20	20	20	15,8	12,8	10,7	10	10	9,7	8,9	8,5	7,9	7,5	7	6,7	6,3	6	5,6	t	P+				
65	4,5 → 25,3	42,2 - 46	20	20	20	16	13	10,8	10,1	10	9,7	9	8,5	7,9	7,5	7	6,7	6,3	t							
	4,5 → 26	43,8 - 48	20	20	20	16,7	13,6	11,4	10,6	10	10	9,5	9	8,4	8	7,5	7,1	6,7	t	P+						
60	4,5 → 25,7	44 - 48,3	20	20	20	16,5	13,6	11,4	10,7	10	10	9,6	9,1	8,5	8,1	7,6	t									
	4,5 → 27,1	46,2 - 50,7	20	20	20	17,6	14,5	12,1	11,4	10,4	10	10	9,7	9	8,6	8,1	t	P+								
55	4,5 → 26,7	47,6 - 52,6	20	20	20	17,5	14,6	12,4	11,7	10,7	10,2	10	10	9,5	t											
	4,5 → 28	49,3 - 54,3	20	20	20	18,4	15,3	13	12,3	11,2	10,6	10	10	9,9	t	P+										
50	4,5 → 25,4	45,3 - 50	20	20	20	16,5	13,7	11,7	11	10,1	10	10	t													
	4,5 → 25,4		20	20	20	16,6	13,9	11,9	11,2	10,3	10	10	t	P+												
45	4,5 → 27,4		20	20	20	18	15	12,8	12,1	11,1	t															
	4,5 → 27,4		20	20	20	18,1	15,3	13,2	12,5	11,6	t	P+														
40	4,5 → 27,7		20	20	20	18,3	15,2	13	t																	
	4,5 → 28		20	20	20	18,6	15,7	13,5	t	P+																
35	4,5 → 28		20	20	20	18,4	15,4	t																		
	4,5 → 28		20	20	20	18,7	16	t	P+																	
30	4,5 → 27,4		20	20	20	18	t																			
	4,5 → 27,8		20	20	20	18,5	t	P+																		

$U_{10} = U_{20} - 1,43 \text{ t max.}$




				17	20	25	30	35	40	42	45	47	50	52	55	57	60	62	65	67	70	72	75	77	80	m
	20 t	10 t																								
80	4 → 17,6	31,2 - 32	20	17,2	13,2	10,5	8,9	7,5	7,1	6,4	6,1	5,6	5,3	4,9	4,6	4,3	4,1	3,8	3,6	3,3	3,2	2,95	2,85	2,65	t	
	4 → 19	33,5 - 34,4	20	18,9	14,4	11,5	9,5	8,3	7,8	7,1	6,7	6,2	5,8	5,4	5,1	4,7	4,5	4,2	4	3,7	3,6	3,3	3,2	2,95	t	P+
75	4 → 20,6	35,8 - 36,6	20	20	15,8	12,6	10,3	8,9	8,4	7,6	7,2	6,6	6,3	5,8	5,5	5,1	4,8	4,5	4,3	4	3,8	3,6	t			
	4 → 22,2	38,4 - 39,3	20	20	17,3	13,8	11,3	9,5	9,3	8,4	8	7,3	6,9	6,4	6,1	5,7	5,4	5	4,8	4,5	4,3	4	t	P+		
70	4 → 24,3	41,2 - 41,9	20	20	19,3	15,3	12,5	10,4	9,7	9,1	8,6	7,9	7,5	6,9	6,5	6,1	5,8	5,4	5,1	4,8	t					
	4 → 25,6	43,4 - 44,2	20	20	20	16,3	13,4	11,2	10,5	9,6	9,2	8,5	8,1	7,4	7,1	6,6	6,3	5,8	5,6	5,2	t	P+				
65	4 → 25,9	43,9 - 44,7	20	20	20	16,5	13,5	11,3	10,6	9,7	9,4	8,6	8,2	7,6	7,2	6,7	6,4	5,9	t							
	4 → 26,7	45,6 - 46,5	20	20	20	17,2	14,2	11,9	11,2	10,2	9,6	9,1	8,6	8	7,6	7,1	6,8	6,3	t	P+						
60	4 → 26,3	45,9 - 46,8	20	20	20	17,1	14,1	11,9	11,2	10,3	9,7	9,2	8,8	8,1	7,8	7,2	t									
	4 → 27,7	48,2 - 49,2	20	20	20	18,1	15	12,7	11,9	10,9	10,3	9,6	9,3	8,7	8,3	7,7	t	P+								
55	4 → 27,3	49,8 - 51	20	20	20	18	15,1	13	12,3	11,3	10,7	10	9,6	9,1	t											
	4 → 28,7	51,5 - 52,7	20	20	20	19	15,9	13,6	12,8	11,8	11,2	10,4	10	9,5	t	P+										
50	4 → 26	47,4 - 48,5	20	20	20	17	14,3	12,2	11,5	10,6	10,1	9,6	t													
	4 → 26	48,5 - 50	20	20	20	17,1	14,5	12,5	11,8	10,9	10,4	10	t	P+												
45	4 → 28,1		20	20	20	18,6	15,6	13,4	12,6	11,7	t															
	4 → 28,1		20	20	20	18,7	15,9	13,8	13,1	12,1	t	P+														
40	4 → 28,4		20	20	20	18,8	15,8	13,6	t																	
	4 → 28,7		20	20	20	19,1	16,2	14	t	P+																
35	4 → 28,6		20	20	20	19	16	t																		
	4 → 28,7		20	20	20	19,2	16,6	t	P+																	
30	4 → 28		20	20	20	18,6	t																			
	4 → 28,5		20	20	20	19,1	t	P+																		

$W_{10} = W_{20} - 0,41 \text{ t max.}$

Lest de contre-flèche / Gegenauslegerballast / Counter-jib ballast / Lastre de contra-flecha / Zavorra di controbraccio
Lastro da contra lança / Противовес стрелы

	110 HPL™			150 HPL™ GH		
	6600 kg	4700 kg	(kg)	6600 kg	4700 kg	(kg)
80 m	6	2	49000	7	0	46200
75 m	7	0	46200	6	1	44300
70 m	7	0	46200	6	1	44300
65 m	7	0	46200	6	1	44300
60 m	6	1	44300	5	2	42400
55 m	5	2	42400	6	0	39600
50 m	6	0	39600	5	1	37700
45 m	4	2	35800	3	3	33900
40 m	5	0	33000	4	1	31100
35 m	4	1	31100	3	2	29200
30 m	4	0	26400	3	1	24500



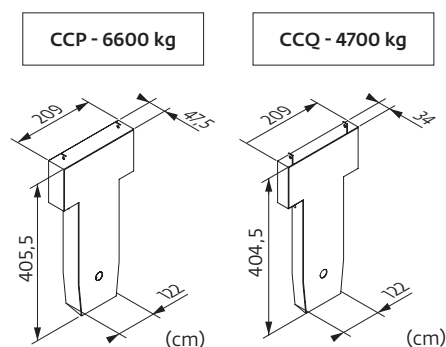













Encombrenment et poids / Abmessungen und Gewicht / Dimensions and weight / Dimensiones y peso / Ingombro e peso
dimensões e pesos / габаритные размеры и вес

Partie tournante / Drehender Kranteil / Slewing crane part / Parte giratoria

Parte rotante / Parte rotativa / Поворотная часть :  80 m -  110 HPL™



Partie tournante / Drehender Kranteil / Slewing crane part Parte giratoria / Parte rotante / Parte rotativa / Поворотная часть		L (m)	I (m)	h (m)	kg (+/- 5%)
Contre-flèche / Gegenausleger Counter-jib / Contra-flecha Controbraccio / Contra-lança Контр-стрела		11,9 11,9	2,2 2,2	2,54 2,54	13600 13200
		19,17 16,15	5,69 5,69	3,93 3,93	15100 14700
		19,17 16,15	5,69 5,69	3,93 3,93	20960 20560
		19,17 16,15	6,72 6,72	3,93 3,93	15600 15100
		19,17 16,15	6,72 6,72	3,93 3,93	15600 15100
		19,17 16,15	6,72 6,72	3,93 3,93	15600 15100
		19,17 16,15	6,72 6,72	3,93 3,93	15600 15100
		19,17 16,15	6,72 6,72	3,93 3,93	15600 15100
Treuil de levage (+ câble) / Hubwerk (+ Seil) Hoisting winch (+ rope) / Mecanismo de elevación (+ cabo) Argano di sollevamento (+ fune) Guincho de elevação (+ cabo) Подъемная лебедка (+ канатом)		3,78 4,82	1,85 1,93	1,88 1,97	5860 8745
Cabine / Kabine Cab / Cabina Cabina / Cabina Кабина		3,36	2,28	2,49	3000
Pivot / Krankopf Towerhead / Pivote Portaralla / Pivot Секция поворотной части		2,76 7,04	2,48 2,48	2,89 2,89	11300 14300
Élément de flèche / Auslegerelement Jib section / Elemento de flecha Elemento di braccio / Elemento de lança Секция стрелы		8,48	1,59	2,47	6700
		10,37	2,24	2,5	6500
		10,37	1,38	2,49	3600
		10,28	1,38	2,44	3080
		10,25	1,38	2,44	2250
		10,27	1,38	2,03	1510
		10,17	1,38	1,73	1040
		5,3	1,38	2,38	1100
		5,2	1,38	1,98	660
		5,09	1,38	1,63	450
		5,18	1,38	2,43	1660
		1,67	1,57	0,58	260

			L (m)	I (m)	h (m)	kg (+/- 5%)	
Chariot / Laufkatze Trolley / Carrello Carro / Carro-distribuidor Тележка			2,23	1,73	1,42	760	
Moufle / Hubflasche Pulley block / Aparejo Bozzello / Cadernal Полиспаст			1,56	0,58	2,44	850	
Chariot / Laufkatze Trolley / Carrello Carro / Carro-distribuidor Тележка			3,8	1,7	1,25	1120	
Moufle / Hubflasche Pulley block / Aparejo Bozzello / Cadernal Полиспаст			1,91	0,34	2,34	920	
Chariot / Laufkatze Trolley / Carrello Carro / Carro-distribuidor Тележка			2	1,7	1,25	600	
Moufle / Hubflasche Pulley block / Aparejo Bozzello / Cadernal Полиспаст			1,25	0,34	2,58	610	
Nacelle de chariot/ Arbeitsbühne an der Laufkatze Trolley inspection platform / Gondola de carro Navicella-carrelino/ Cesta do carro Платформа тележки			0,96	1,05	2,12	55	
Pylône / Kranturm / Crane tower Mástil / Torre / Torre Башня крана							
T 851			11,18	4,84	5,8	15750	
K 84/K 84-2			2,24	3,24	2,5	3050	
K 85/KR 84B2 KM 850.10B KM 850.14B K 85/KR 84A2 KMT 850.10A KMT 850.14A K 849A KMT 849A KR 849A KRMT 849A KRMT 849C KMT 850.10C			10,24 10,32 10,32 5,24 5,32 5,32 5,23 5,23 5,23 5,23 3,57 3,65	2,54 2,54 2,54 2,54 2,54 2,54 2,53 2,55 2,53 2,55 2,55 2,54	2,5 2,51 2,51 2,5 2,51 2,51 2,5 2,53 2,5 2,53 2,53 2,51	9635 10070 11190 5550 5450 5990 3400 3150 4290 4090 3205 4230	
Pieds de scellement / Verankerungsfüße Fixing angles / Pie de empotramiento Montante da annegare / Angulos fixadores анкера			P 800B P 854A	0,75 0,9	0,75 0,9	1,28 1,5	465 940
Bras de croix / Fundamentkreuzträger Cross girder / Brazo en cruz / Braccio croce / Braço da cruz Поперечная балка			ZX 6830	9,1	1,12 0,76	1,1 1,48	5265 5445
1/2 Bras de croix / 1/2 Fundamentkreuzträger 1/2 Cross girder / 1/2 Brazo en cruz 1/2 Braccio croce / 1/2 Braço da cruz 1/2 Поперечная балка			ZY 800 ZY 854	5,68 5,66	0,98 0,98	1,92 2,27	4720 5940
Bras de croix / Fundamentkreuzträger Cross girder / Brazo en cruz Braccio croce / Braço da cruz Поперечная балка			ZY 800 ZY 854	11,96 11,9	1,39 1,42	1,92 2,27	10075 13350

Mécanismes / Triebwerke / Mechanisms / Mecanismos / Meccanismi
Mecanismos / Механизмы

400 V - 50 Hz													ch - PS hp	kW	
	110 HPL™ 50	m/min	42	54,5	76	115	172,5	21	27,5	39	59	93	110	82	1069 m
		t	10	7,5	5	2,5	0,2	20	15	10	5	0,3			
	150 HPL™ 50 GH	m/min	55	68,5	92,5	144	195	28	35	48,5	80	97,5	150	110	1200 m
		t	10	7,5	5	2,5	0,8	20	15	10	5	3			
	10 DVF 10 Optima	m/min	0 → 80 (20 t) 0 → 100 (12,5 t) 0 → 110 (6,3 t)										10	7,4	
	RVF 173 Optima+	tr/min U/min rpm	0 → 0,7										3 x 10	3 x 7,5	
															

	kVA	
400 V (+10% -10%) 50 Hz	110 HPL™ : 125 → 81 kVA 150 HPL™ GH : 157 → 97 kVA	

	FR	DE	EN	ES	IT	PT	RU
	Profil de vent suivant EN 14439 C25-D25	Windbedingungen gemäß EN 14439 C25-D25	Wind conditions according to EN 14439 C25-D25	Conformidad de los condiciones de viento EN 14439 C25-D25	Condizioni del vento secondo EN 14439 C25-D25	Perfil de vento conforme EN 14439 C25-D25	Ветровой режим в соответствии с EN 14439 C25-D25
	Appel de flèche	Auslegerüberhöhung	Jib elevation	Elevación de la flecha	Inclinazione braccio	Desvio da lança	подъем стрелы
	Équipements standards	Standardausrüstungen	Standard equipment	Equipamiento de serie	Equipaggiamento standard	Equipamento de série	Стандартное оборудование
	Équipements optionnels	Sonderausrüstungen	Options	Equipamiento opcional	Equipaggiamento in opzione	Equipamento opcional	Дополнительное оборудование (опция)
	Fonction Potain Plus : Courbes de charges Plus	Funktion Potain Plus: Plus-Lastkurven	Potain Plus function: Plus load curves	Función Potain Plus: Diagrama de cargas Plus	Funzione Potain Plus: Curve di carico Plus	Função Potain Plus: Diagrama de cargas Plus	Функция контроля мощности Potain Plus: Диаграммы грузоподъемности Plus
	Hauteurs sous crochet associées aux courbes de charges Plus	Hakenhöhen mit Plus-Lastkurven	Hook heights with Plus load curves	Altura bajo gancho, usando el diagrama de cargas Plus	Altezze sotto gancio con curve di carico Plus	Altura livre, utilizando o diagrama de cargas Plus	Высота под крюком для диаграмм грузоподъемности Plus
	Réactions en service	Reaktionskräfte in Betrieb	Reactions in service	Reacciones en servicio	Reazioni in servizio	Reacções em serviço	Реакция при работе
	Réactions hors service	Reaktionskräfte außer Betrieb	Reactions out of service	Reacciones fuera de servicio	Reazioni fuori servizio	Reacções fora de serviço	Реакция в покое
	Poids total du lest	Ballast-Gesamtgewicht	Total ballast weight	Peso total del lastre	Peso totale della zavorra	Peso total do lastro	Общий вес балласта
	Cadre d'ancrage serré	Fester Verankerungsrahmen	Tightened anchorage frame	Marco de anclaje de apriete	Quadro di ancoraggio stretto	Quadro de amarração apertado	Прикрепленная анкерная рама
	Cadre d'ancrage desserré	Loser Verankerungsrahmen	Loosened anchorage frame	Marco de anclaje de desapriete	Quadro di ancoraggio allentato	Quadro de amarração solto	Отсоединенная анкерная рама
	Camion 13,4 m	Lkw 13,4 m	Lorry 13,4 m	Camión 13,4 m	Camion 13,4 m	Camião 13,4 m	Резусовой автомобиль 13,4 м
	Conteneur High Cube 40', et/ou Flat Rack 20'	Container High Cube 40', und/oder Flat Rack 20'	Container High Cube 40', and/or Flat Rack 20'	Contenedor High Cube 40', y/o Flat Rack 20'	Container High Cube 40', e/o Flat Rack 20'	Contentor High Cube 40', e/ou Flat Rack 20'	40-футовый контейнер повышенной вместимости High Cube, и/или 20-футовая открытая платформа Flat Rack
	Levage	Heben	Hoisting	Elevación	Sollevamento	Elevação	Подъем
	Distribution	Katzfahren	Trolleying	Distribución	Ditribuzione	Distribuição	Перемещение по стреле
	Orientation	Schwenken	Slewing	Orientación	Rotazione	Rotação	Поворот
	Translation	Kranfahren	Travelling	Traslación	Traslazione	Translação	Перемещение крана
	Puissance requise	Erforderliche Leistung	Required power	Potencia Necesaria	Potenza richiesta	Potência Necessária	Потребляемая мощность
	Fonction Power Control : vitesses treuils adaptées à la puissance disponible	Funktion Power Control: Geschwindigkeiten der Triebwerke werden an die verfügbare Leistung angepasst	Power Control Function: winch speeds adapted to the available power	Función Power Control: marchas de los cabrestantes adaptadas a la potencia disponible	Funzione Power Control: velocità degli argani adattate alla potenza disponibile	Função Power Control: velocidades de guincho adaptadas à potência disponível	Функция контроля мощности Power Control: регулировка скорости лебедок в зависимости от доступной мощности
	Nous consulter	Auf Anfrage	Consult us	Consultarnos	Consultateci	Consultar-nos	Проконсультируйтесь у нас
	Document commercial non contractuel. Pour toute information technique se référer à la notice correspondante.	Unverbindliches Vertriebsdokument. Für technische Informationen, siehe die entsprechenden Anweisungen.	This commercial document is not legally binding. For any technical information, please refer to the corresponding instructions.	Documento comercial no contractual. Para cualquier información técnica, ver la noticia correspondiente.	Documento commerciale non vincolante, per tutte le informazioni tecniche fare riferimento al catalogo istruzioni.	Documento comercial não contratual. Para qualquer informação técnica complementar consultar as respectivas instruções.	Этот коммерческий документ не является юридически обязательным. Для получения технической информации, см. соответствующие инструкции.

